


FLEECE'N'FLEX TEXTURE | TECHNICAL DATA SHEET

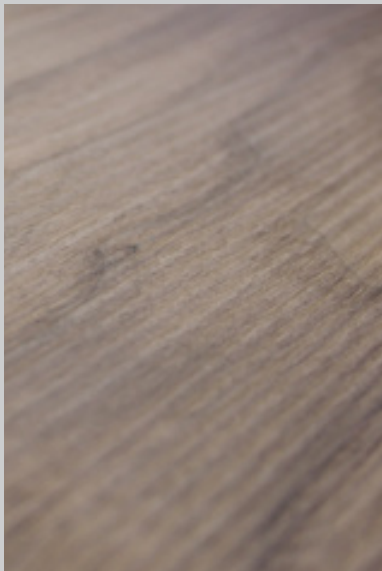

- **Several texture variants** available in more than 140 species of wood
- **Standard sheets:** 2440 x 1220 mm, approximately 1.2 mm thick
- **Standard plank matched**, other jointing techniques available on request
- **Minimum order:** 100 sq m per order
- **Structure:** two-layer veneer surfaces with fleece layer inbetween; back (bonding surface) of pre-sanded, smooth beech veneer, face side of precious veneer selected by customer
- **Delivery of sheets:** covered in PE film on pallets
- **Storage:** Ideally between about 18 to 25°C and 40 to 60% relative humidity. Protect from UV rays and fluctuations in humidity, with film if necessary. Subject the veneer to climate conditioning before processing.
- **Bonding:** With all conventional bonding agents for veneer or fleece-backed veneer. The textured surface is more suitable for bonding in standard industry presses. We recommend using a press pad / press fleece or the like and making a sample bonding.
- **Surface treatment:** Lacquer or oil can be applied. Please make sure that you use a composite material with a certain scallop height.
- **Roller application:** select soft rollers for application
- **Spray application:** Choose amount and viscosity so that the texture is retained
- **Sanding:** Surface is pre-sanded, but its color can be impaired by thermal stress. If you want to prevent this reaction, you can treat the surface with abrasive fleece. Do not use sanding belts or sandpaper!

Sales

Schorn & Groh GmbH
Printzstraße 15-17
76139 Karlsruhe, Germany
Phone +49 721 962450
info@sg-veneers.com

Production & sales

Schorn & Groh GmbH
Industriestraße 34
74927 Eschelbronn, Germany
Phone +49 6226 7857350
sg-eschelbronn@sg-veneers.com



SCHORN & GROH
Furniere · Veneers